

**Speaker**

**Model: OSS15-40A1.0W8**




**ELECTRICAL SPECIFICATIONS**

	Condition	Parameter	Unit
Sound Pressure Level	at 0.1W, 0.1M [at 0.5, 0.6, 0.8, 1.0KHz]	88 ± 3	dB
Impedance	at 1V, 1000Hz	8 ± 15%	Ω
Rated Input Power		1	W
Max Input Power		1.5	W
Resonant Frequency (Fo)	at 1V	400 ± 20%	Hz
Frequency Range		F0 ~ 12000	Hz
Buzzer & Rattles	not be audible at sine wave between F0 ~ 6KHz	2.82	V
Operating Temperature		-20 ~ 60	°C
Magnet		Nd-Fe-B	
Frame Material		ABS	
Cone Material		Mylar (PEI)	
Weight		6.6	g

**MECHANICAL DRAWING**

Dimensions in mm

Tolerance ±0.5mm Except Specified

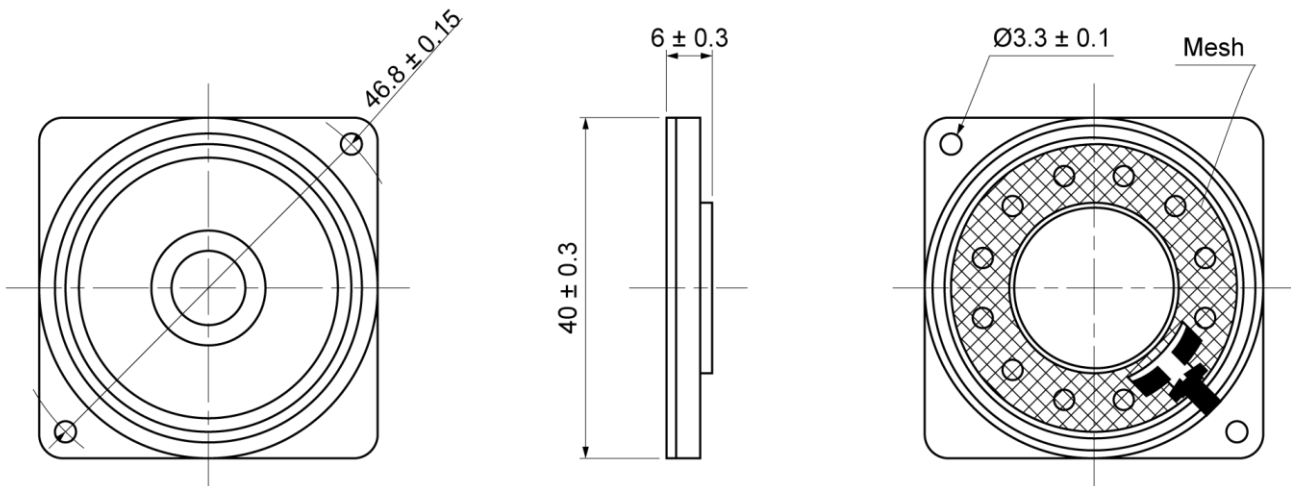

Speaker

Model: OSS15-40A1.0W8

FREQUENCY RESPONSE CURVE

