

Speaker

Model: OSS22-3920-8A2.0W8-C



ELECTRICAL SPECIFICATIONS

	Condition	Parameter	Unit
Sound Pressure Level	at 1.0W, 1.0M [at 1.2, 1.5, 2.0, 2.5KHz]	82 ± 3	dB
Impedance	at 1V, 1000Hz	8 ± 15%	Ω
Rated Input Power		2	W
Max Input Power		2.5	W
Resonant Frequency (Fo)	at 1V	1200 ± 20%	Hz
Frequency Range		F0 ~ 10000	Hz
Buzzer & Rattles	not be audible at sine wave between F0 ~ 5KHz	4	V
Operating Temperature		-30 ~ 70	°C
Magnet		Nd-Fe-B	
Frame Material		PBT	
Cone Material		Cloth	
Weight		6.6	g


MECHANICAL DRAWING

Dimensions in mm

Wire: 60mm, UL1571, #32AWG

Tolerance ±0.5mm Except Specified

Connector: substitute moxex 1.25mm, 2pin

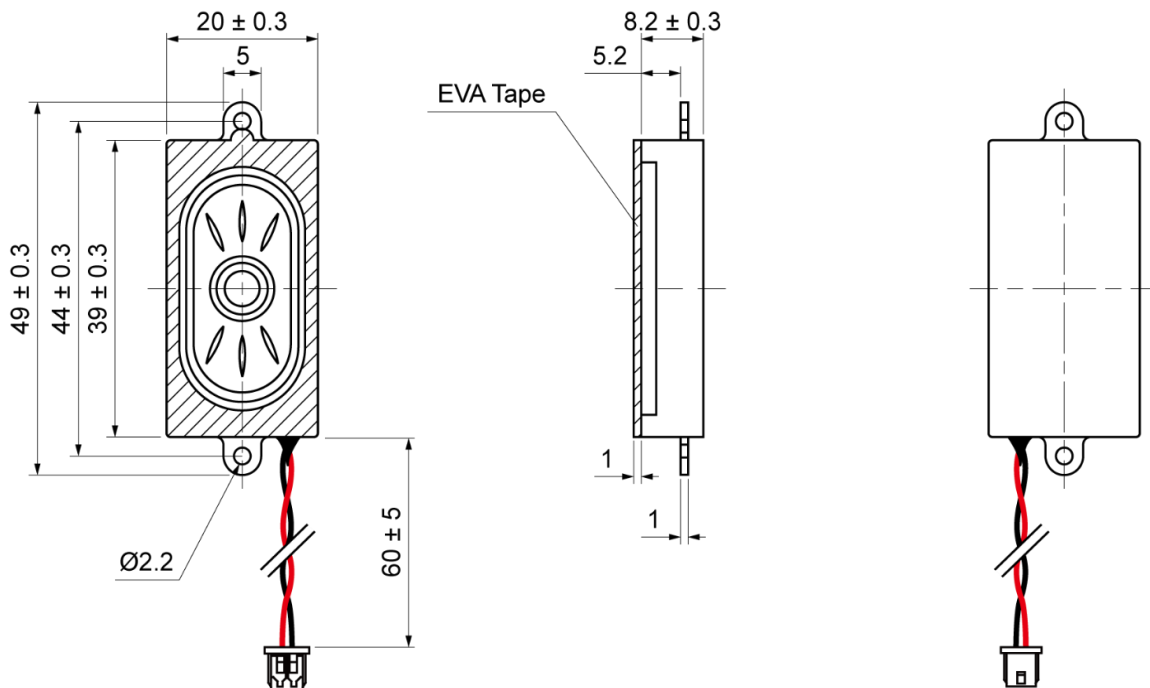

Speaker

Model: OSS22-3920-8A2.0W8-C

FREQUENCY RESPONSE CURVE

