

**Speaker**

**Model: OSS23-2613-8A1.2W6-C**



**ELECTRICAL SPECIFICATIONS**

	Condition	Parameter	Unit
Sound Pressure Level	at 1.2W, 0.1M [at 2.0KHz]	95 ± 3	dB
Impedance	at 1V, 1000Hz	6 ± 20%	Ω
Rated Input Power		1.2	W
Max Input Power		1.5	W
Resonant Frequency (Fo)	at 1V	1000 ± 20%	Hz
Frequency Range		500 ~ 20000	Hz
Buzzer & Rattles	not be audible at sine wave between 500 ~ 20KHz	2.68	V
Operating Temperature		-25 ~ 75	°C
Magnet		Nd-Fe-B	
Frame Material		ABS	
Cone Material		PEEK	
Weight		6	g


**MECHANICAL DRAWING**

Dimensions in mm

Wire: UL3302 AWG30

Tolerance ±0.5mm Except Specified

Connector:

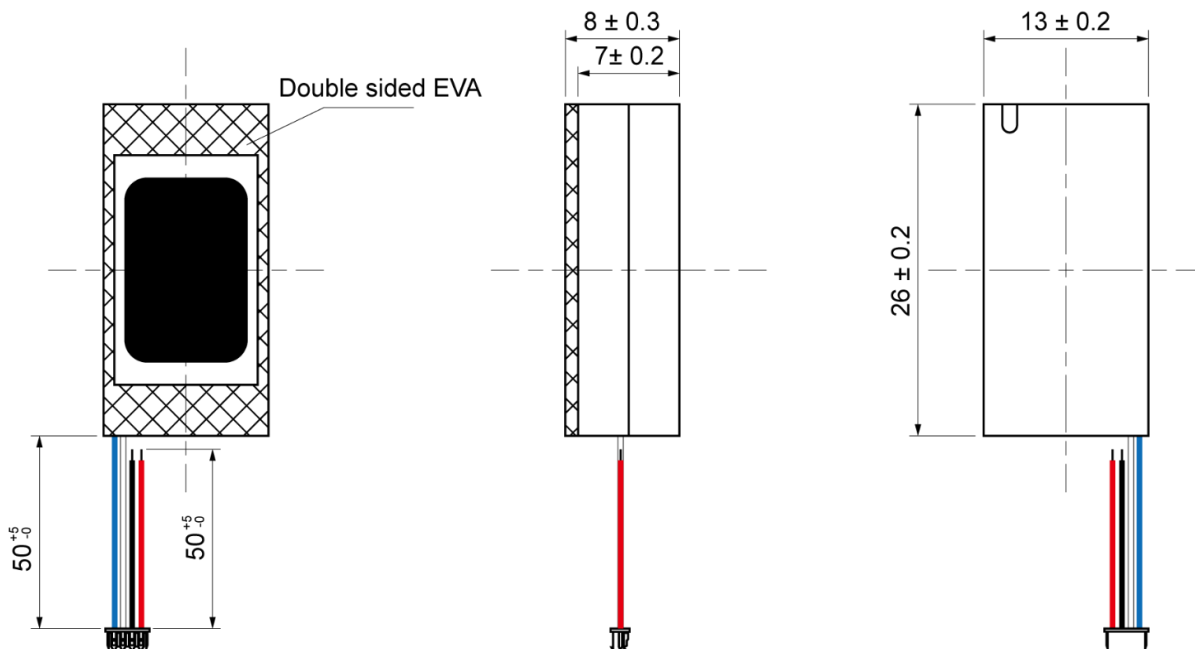

**Speaker**

**Model: OSS23-2613-8A1.2W6-C**

**FREQUENCY RESPONSE CURVE**

