

Speaker

Model: OSS26-2420-8A0.5W8-C



ELECTRICAL SPECIFICATIONS

	Condition	Parameter	Unit
Sound Pressure Level	at 0.7W, 0.1M [at 0.8, 1.0, 1.5, 2.0KHz]	86 ± 3	dB
Impedance	at 1V, 1000Hz	8 ± 20%	Ω
Rated Input Power		0.5	W
Max Input Power		1	W
Resonant Frequency (Fo)	at 1V	850 ± 15%	Hz
Frequency Range		500 ~ 20000	Hz
Buzzer & Rattles	not be audible at sine wave between F0 ~ 20KHz	2	V
Operating Temperature		-30 ~ 70	°C
Magnet		Nd-Fe-B	
Frame Material		PPA+PC540	
Cone Material		PEEK	
Weight		12	g


MECHANICAL DRAWING

Dimensions in mm

Wire: 45mm, 1571 #30 AWG

Tolerance ±0.5mm Except Specified

Connector: JST SHR-02V-S-B

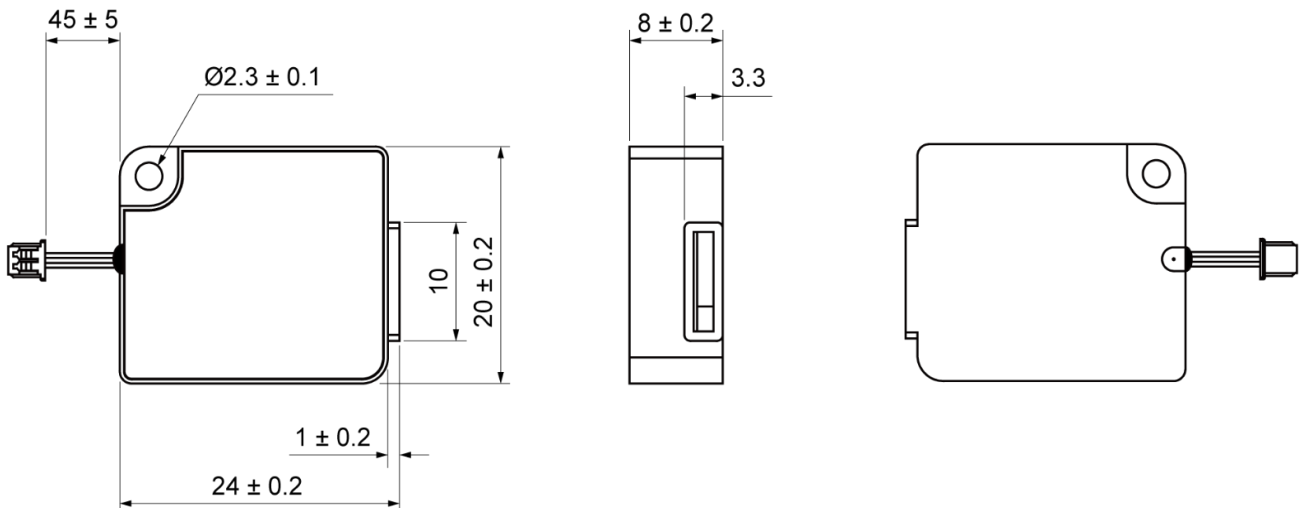

Speaker

Model: OSS26-2420-8A0.5W8-C

FREQUENCY RESPONSE CURVE

