

Speaker

Model: OSS38-4030-6A2.0W4




ELECTRICAL SPECIFICATIONS

	Condition	Parameter	Unit
Sound Pressure Level	at 1.0W, 0.5M [at 0.8, 1.0, 1.2, 1.5KHz]	80 ± 3	dB
Impedance	at 1V, 1000Hz	4 ± 15%	Ω
Rated Input Power		2	W
Max Input Power		2.5	W
Resonant Frequency (Fo)	at 1V	400 ± 20%	Hz
Frequency Range		F0 ~ 10000	Hz
Buzzer & Rattles	not be audible at sine wave between F0 ~ 5KHz	2.83	V
Operating Temperature		-20 ~ 60	°C
Magnet		NdFeb	
Frame Material		ABS	
Cone Material		Paper	
Weight		8	g

MECHANICAL DRAWING

Dimensions in mm

Tolerance ±0.5mm Except Specified

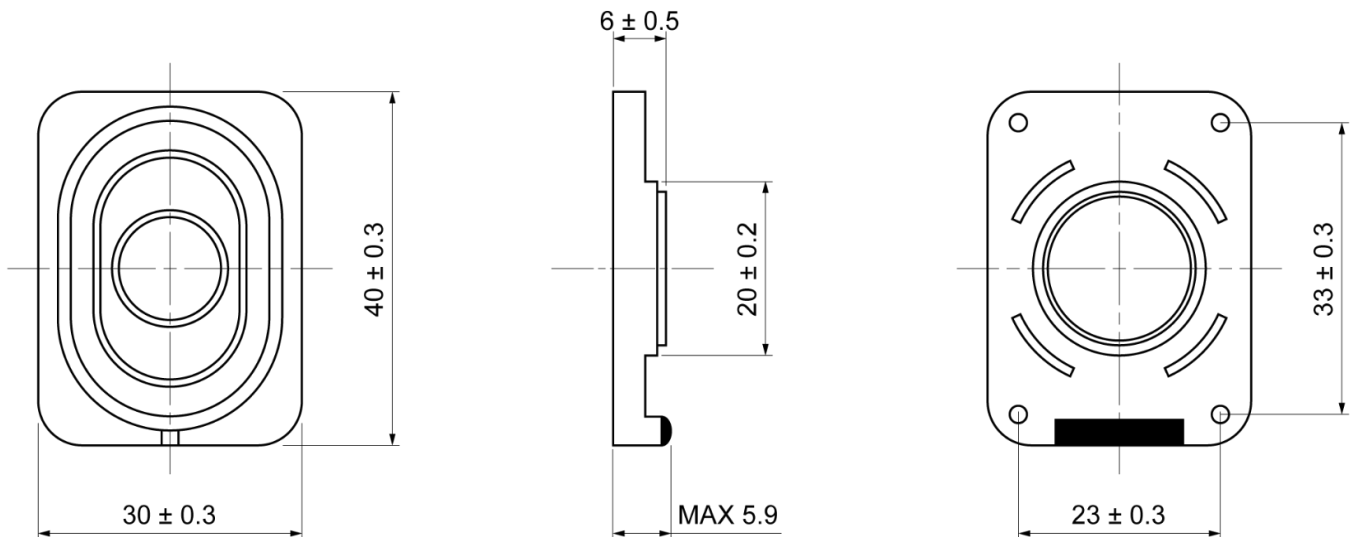

Speaker

Model: OSS38-4030-6A2.0W4

FREQUENCY RESPONSE CURVE

