

Speaker

Model: OSS43-4030-15A2.0W4-C



ELECTRICAL SPECIFICATIONS

	Condition	Parameter	Unit
Sound Pressure Level	at 0.1W, 0.1M [at 0.8, 1.0, 1.2, 2.0KHz]	95 ± 3	dB
Impedance	at 1V, 1000Hz	4 ± 15%	Ω
Rated Input Power		2	W
Max Input Power		3	W
Resonant Frequency (Fo)	1KHz	1000 ± 20%	Hz
Frequency Range		Fo ~ 20000	Hz
Buzzer & Rattles	not be audible at sine wave between 200 ~ 2KHz	2.83	V
Operating Temperature		-40 ~ 70	°C
Magnet		Nd-Fe-B	
Frame Material		Plastic	
Cone Material		PET	
Weight		12	g
Dustproof And Waterproof Level	IEC 529 edition 2.0 (1989)	IP67	


MECHANICAL DRAWING

Dimensions in mm

Wire: 80mm, UL1571, AWG#26

Tolerance ±0.5mm Except Specified

Connector: JST XHP-2

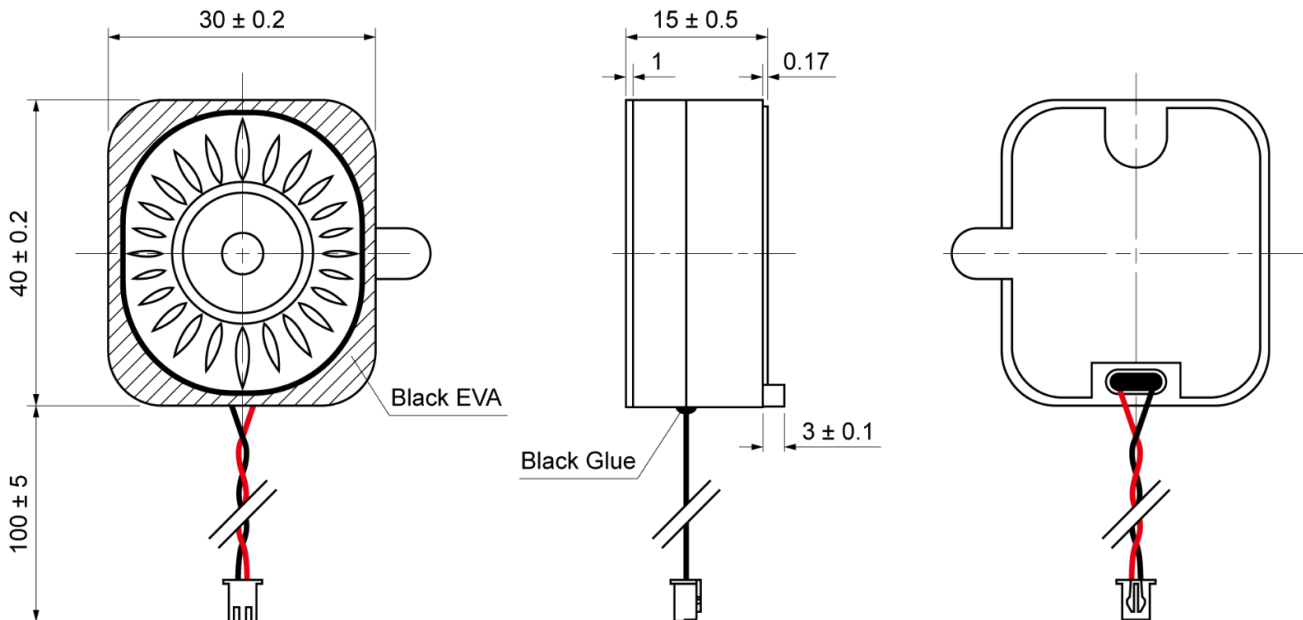

Speaker

Model: OSS43-4030-15A2.0W4-C

FREQUENCY RESPONSE CURVE

