

Micro Speaker

Model: OSR13R-2.8M0.2W8M




ELECTRICAL SPECIFICATIONS

	Condition	Parameter	Unit
Sound Pressure Level	at 0.1W, 10cm [at 0.8, 1.0, 1.2, 1.5 KHz]	85 ± 3	dB
Impedance	at 1V, 2KHz	8 ± 15%	Ω
Rated Input Power		0.2	W
Max Input Power		0.3	W
Resonant Frequency (Fo)	at 1V	1100 ± 20%	Hz
Frequency Range		700 ~ 5000	Hz
Buzzer & Rattles	not be audible at sine wave between 700 ~ 5KHz	1.26	V
Operating Temperature		-20 ~ 60	°C
Magnet		Nd-Fe-B	
Frame Material		Metal	
Cone Material		Mylar (PET)	
Weight		0.8	g

MECHANICAL DRAWING

Dimensions in mm

Tolerance ±0.3mm Except Specified

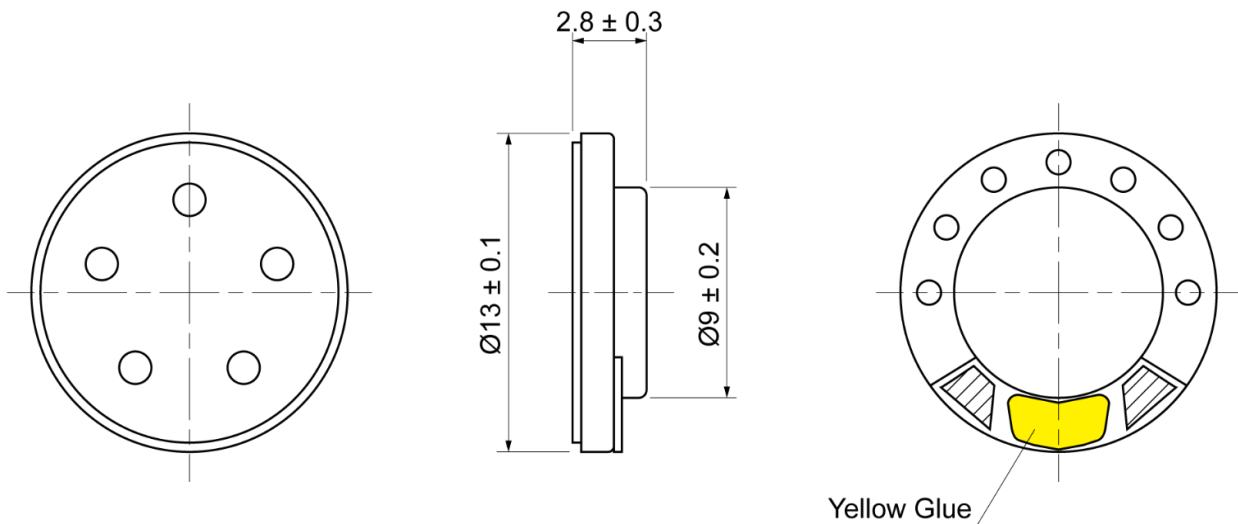

Micro Speaker

Model: OSR13R-2.8M0.2W8M


FREQUENCY RESPONSE CURVE

UGS1308-01

0.1W

0.1m

0.89V

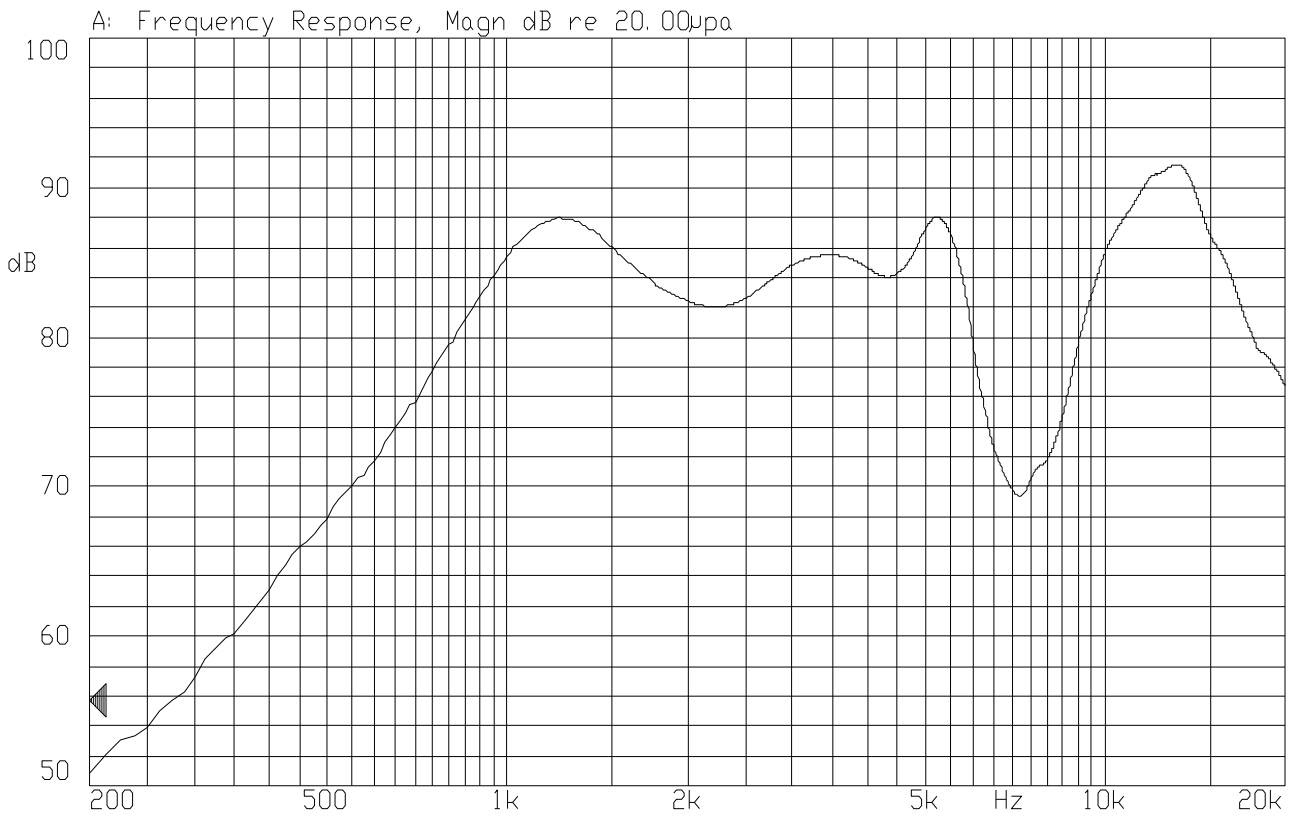

16-MAR-2007 15:00:25

Mode: TSR

